

Pre-Fabricated, Reinforced Fiberglass

Easier to Ship and Install Than Concrete Pits

Up to 600 Gallons and 3-Stage Processing

Economical Alternative to Concrete Pits

Water Maze's pre-fabricated fiberglass pits offer an economical solution to in-ground, oil-water separation as well as a safe and convenient method of capturing wash water.

The fiberglass pit system is easier to install and less expensive to ship than forming pits on site or purchasing straight pre-cast pits. Furthermore, they feature double containment to eliminate leaks, offer pre-formed grating and simply look better than concrete or metal pits.



The fiberglass pits must be installed in concrete on all sides. Each pit comes with step-by-step installation instructions.

Once installed, the reinforced fiberglass sidewalls prevent bowing and underground movement. The larger collection pit works best when combined with a catch basin and sump pit, which are also made of the same long-lasting, chemical-resistant, reinforced fiberglass.

The larger collection pit is designed with baffles to force oil to rise and other debris to sink. Also, Water Maze's oil-coalescing plates are designed to fit snugly into the center chamber to enhance separation effectiveness.

Fiberglass Pit Specifications

Features	30-710	30-714	30-715
Description	Collection Pit	Catch Basin	Catch Basin/Sump Pit
Holding Capacity	600 gal	159 gal	47 gal
Outside Dimen. (LxWxH)	119" x 45" x 55"	46.5" x 46.5" x 58"	31.25" x 31.25" x 38"
Shipping Weight	302 lbs	130 lbs	75 lbs

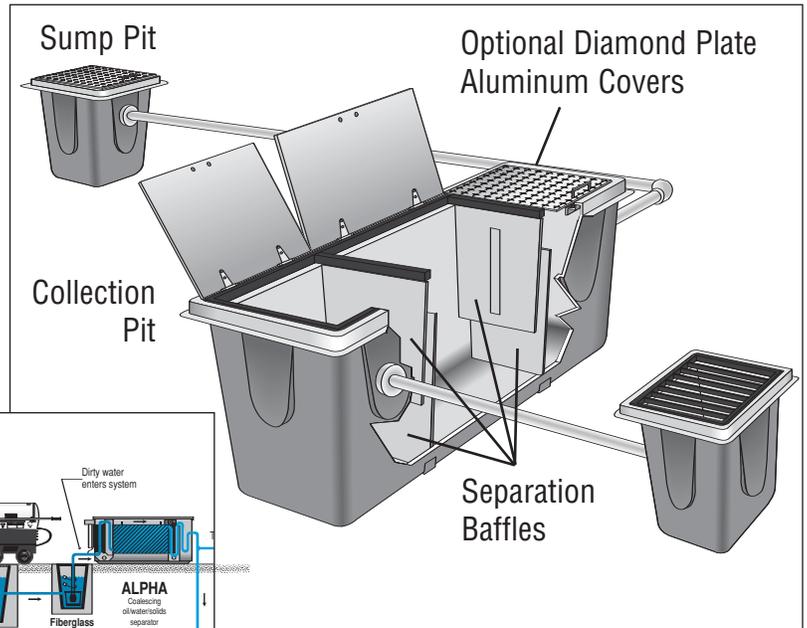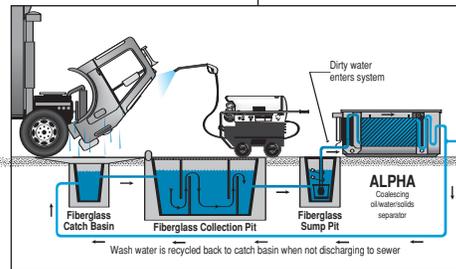

AVAILABLE OPTIONS

Part No.	Description
30-720	Coalescing grid pack 850 sq. ft. (2 required). Enhances oil/water separation when discharging to sanitary sewer
30-721	Collection pit cover (3' x 9'), hinged aluminum diamond tread plate with steel tube frame (120 lbs shipping weight)
30-722	Cover (2' x 2') for sump pit, aluminum diamond tread plate with steel tube frame (40 lbs shipping weight).
30-723	Grating (2' x 2') for sump pit (30-715), hot rolled 1/2" x 2" steel flatbar (190 lbs shipping weight)
30-724	Grating (1.5' x 3') for catch basin (30-714), hot rolled 1/2" x 2" steel flatbar; set of 2 (270 lbs shipping weight)
2-010048	3" Bulkhead fitting, threaded
9-5025	4-1/2" hole saw
9-5026	Arbor for hole saw (7/16"); for installation of bulkhead fitting
4-0422015	Wood brace kit (specially designed bracing to reinforce fiberglass collection pit while pouring concrete)
30-775	Strainer, catch basin, stainless steel



1150 Davis Road, Suite J, Elgin, IL 60123
P: (847) 468-8800 • (800) 788-8867 • F: (847) 468-8811
www.lorchem.com • info@lorchem.com

We Know How To Get Things **CLEAN**