


KÄRCHER

makes a difference

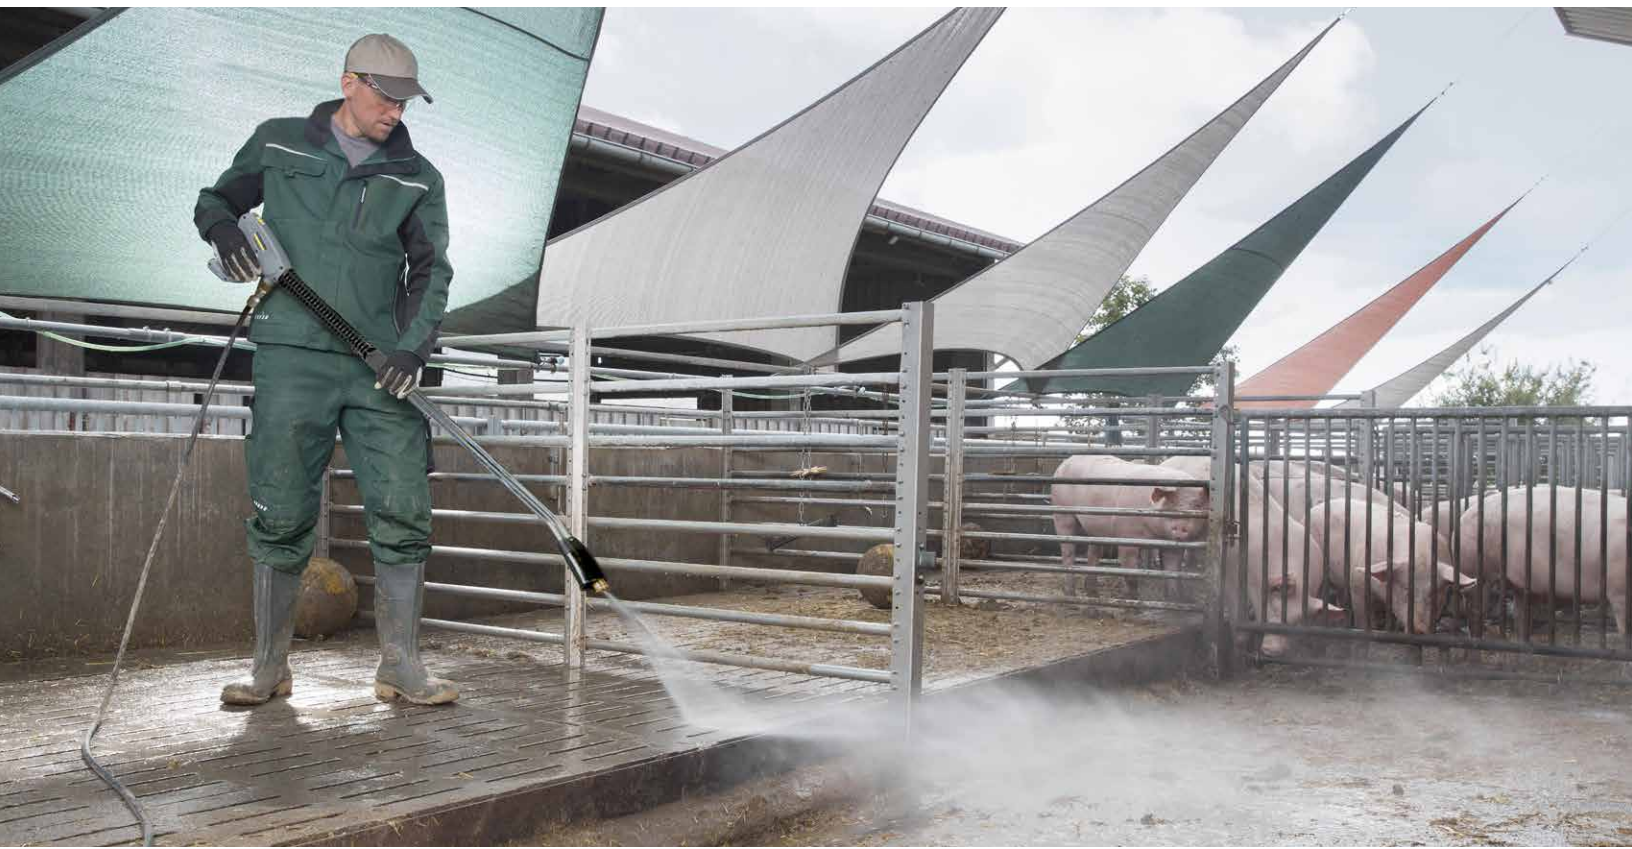

FOR RUGGED OPERATIONS.

Electric roll cage hot water pressure washer.

PROFESSIONAL | HDS CAGE

HDS CAGE



Rugged operations.

Built on a rugged 1-1/4" powder coated steel frame, these compact electric roll cage models are designed for construction sites, farms and factories where electricity is available. The three models deliver hot water cleaning of up to 2000 PSI using 120V or 230V/1ph. Each features a Kärcher direct-drive crankcase-style pump with limited 7-year warranty, industrial-grade motor, flat-free tires and 1/2" Schedule 80 heating coil with stainless steel wrap. All are certified to UL and CSA safety standards.



1 Powerful and Durable

- 120V 1725 RPM or 230V 3450 RPM industrial-grade Baldor motors provide reliable power to the pump.
- Industrial-grade, tri-plunger, oil-bath, direct-drive, Kärcher pump with 7-year warranty.
- 50 ft. of durable, wire braid hose rated for 3000 PSI and with hose guard for burst.
- Safety relief valve attached to discharge side for protection against excess pressure build up.
- Insulated Schedule 80 heating coil is made of 1/2-inch steel pipe and cold-rolled; comes standard with stainless steel coil wrap and 5-year warranty.
- Thermal pump saver valve protects against hot-water damage by venting recirculated water.

2 Smart Features

- Efficient burner with transformer for years of reliable and affordable operation.
- Easy-to-attach downstream detergent injection with quick couplers and brass soap nozzle.
- Fuel filter/water separator ensures pure fuel supply.
- Insulated, high-pressure trigger gun for hours of fatigue-free cleaning.
- EASY!Force trigger gun with cruise control like technology uses its own recoil force to hold the trigger down - so, no more sore hands after hours of use.

3 Mobility

- Compact 1 1/4" powder-coated steel roll-cage frame protects machine components and is highly maneuverable.
- 13-inch tubed pneumatic tires for easy handling on all terrains.

Technical data and equipment.

Technical data

| Model | Part No. | GPM | PSI | Drive | HP | Electrical | Amps | Pump | Ship Weight (lbs.) | Ship Dimensions (L x W x H) inches |
|--------------------|-------------|-----|------|--------|-----|------------|------|------------|--------------------|------------------------------------|
| HDS 2.0/10 Ed Cage | 1.575-511.0 | 2.1 | 1000 | Direct | 1.5 | 120V / 1ph | 15 | Kärcher KF | 480 | 50 x 40 x 50 |
| HDS 1.9/15 Ed Cage | 1.575-512.0 | 1.9 | 1500 | Direct | 2 | 120V / 1ph | 20 | Kärcher KF | 480 | 50 x 40 x 50 |
| HDS 3.5/20 Ea Cage | 1.575-513.0 | 3.5 | 2000 | Direct | 5 | 230V / 1ph | 22 | Kärcher KF | 500 | 50 x 40 x 50 |

Standard EASY!Force Accessory

| Order No. | Description |
|-------------|---|
| 8.756-481.0 | EASY!Force trigger gun (North American Model) - zero force required. Standard 1/4" connection for wand, 3/8" connection for hose. |

Options (field installed)

| Order No. | Description |
|-------------|--|
| 9.801-024.0 | 100' EZEE hose reel kit (hose not included) |
| 9.804-570.0 | 100' Pivot hose reel kit (hose not included) |

For more information:



1150 Davis Road, Suite J ■ Elgin, IL 60123
(800) 788-8867 ■ info@lorchem.com ■ lorchem.com

We Know How To Get Things **CLEAN**